




Features


- Fanless
- Intel® Atom™ N270 1.6GHz processor
- IP 65 compliant except I/O side
- Resistive or GFG touch for option
- DC 11~32V wide-range power input



Specifications

System	
Processor	Intel® Atom™ N270 1.6GHz processor built-in, FSB 533 MHz
System Memory	1 x 200-pin 400/533 MHz SO-DIMM slot up to 2GB, default 1GB/533 MHz
System Chipset	Intel® 945GSE + ICH7M
External I/O Port	<ul style="list-style-type: none"> • 4 x USB ports • 2 x RJ-45 ports • 1 x DB-9 RS-232 (COM 1) • 1 x DB-15 VGA • 1 x MIC, Line-in, Line-out • 1 x 3-pin DC Power input terminal
Storage	<ul style="list-style-type: none"> • 1 x 2.5" SATA HDD • 1 x CF slot (Internal)
Expansion Slots	None
OS Support	Windows® XP Pro, XP Embedded, Windows® 7
LCD	
Display Type	12.1" TFT-LCD
Max. Resolution	800x600
Max. Color	262K
Luminance (cd/m ²)	350
View Angle	H:140° / V:110°
Backlight Lifetime	50,000 hrs
Touch Screen	
Type	Analog resistive (optional)
Light Transmission	80%
Power Supply	
Power Input	DC 11~32V

Dimension

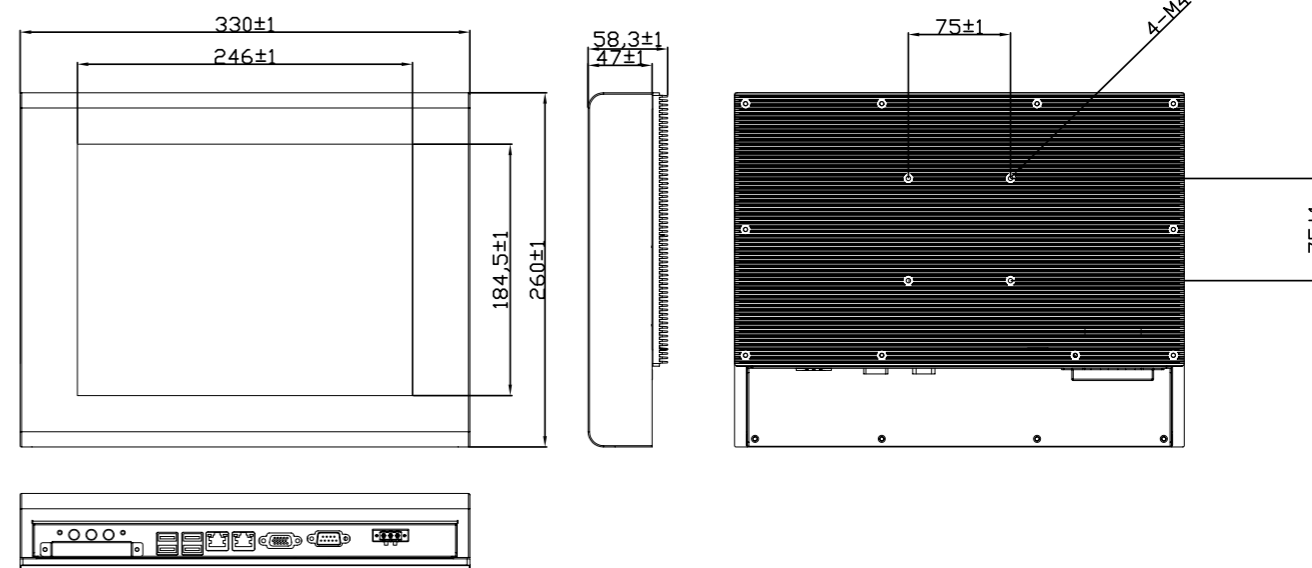

Unit : mm

Mechanical	
Construction	Stainless steel front bezel and aluminum extrusion back cover
IP Rating	IP 65 except I/O side
Mounting	Panel / VESA 75x75 Mount
Dimension	330(W)x260(H)x58.3(D)mm
Net Weight	5 kgs
Environmental	
Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C, non-condensing
Certificate	Meet CE/FCC Class A
Ordering Information	
APC-3284	12.1" Intel® Atom™ N270 1.6GHz ultra slim IP 65 stainless steel fanless panel PC
APC-3284T	12.1" Intel® Atom™ N270 1.6GHz ultra slim IP 65 stainless steel fanless panel PC w/Touch screen