




## Features


- Fanless
- Intel® Atom™ N270 1.6GHz processor
- IP 65 compliant except I/O side
- Resistive or GFG touch for option
- DC 11~32V wide-range power input



## Specifications

System	
Processor	Intel® Atom™ N270 1.6GHz processor built-in, FSB 533 MHz
System Memory	1 x 200-pin 400/533 MHz SO-DIMM slot up to 2GB, default 1GB/533 MHz
System Chipset	Intel® 945GSE + ICH7M
External I/O Port	Standard I/O: <ul style="list-style-type: none"> <li>• 4 x USB 2.0 connector</li> <li>• 2 x RJ-45 LAN connector</li> <li>• 1 x DB-9 RS232 (COM 1)</li> <li>• 1 x DB-9, COM2 (RS-232/422/485 selection, default RS-232)</li> <li>• 1 x DB-15 VGA</li> <li>• 1 x MIC, LINE-Out, LINE-in</li> <li>• 1 x Power Switch (ATX)</li> <li>• 1 x 3-pin DC Power input terminal</li> </ul>
Storage	<ul style="list-style-type: none"> <li>• 1 x 2.5" SATA HDD</li> <li>• 1 x CF slot (internal)</li> </ul>
Expansion Slots	None
OS Support	Windows® XP Pro, XP Embedded, Windows® 7
LCD	
Display Type	17" TFT-LCD
Max. Resolution	1280x1024
Max. Color	16.7M
Luminance (cd/m²)	350
View Angle	H:170° / V:160°
Backlight Lifetime	50,000 hrs
Touch Screen	
Type	Analog resistive (optional)
Light Transmission	80%
Power Supply	
Power Input	DC 11~32V

## Dimension

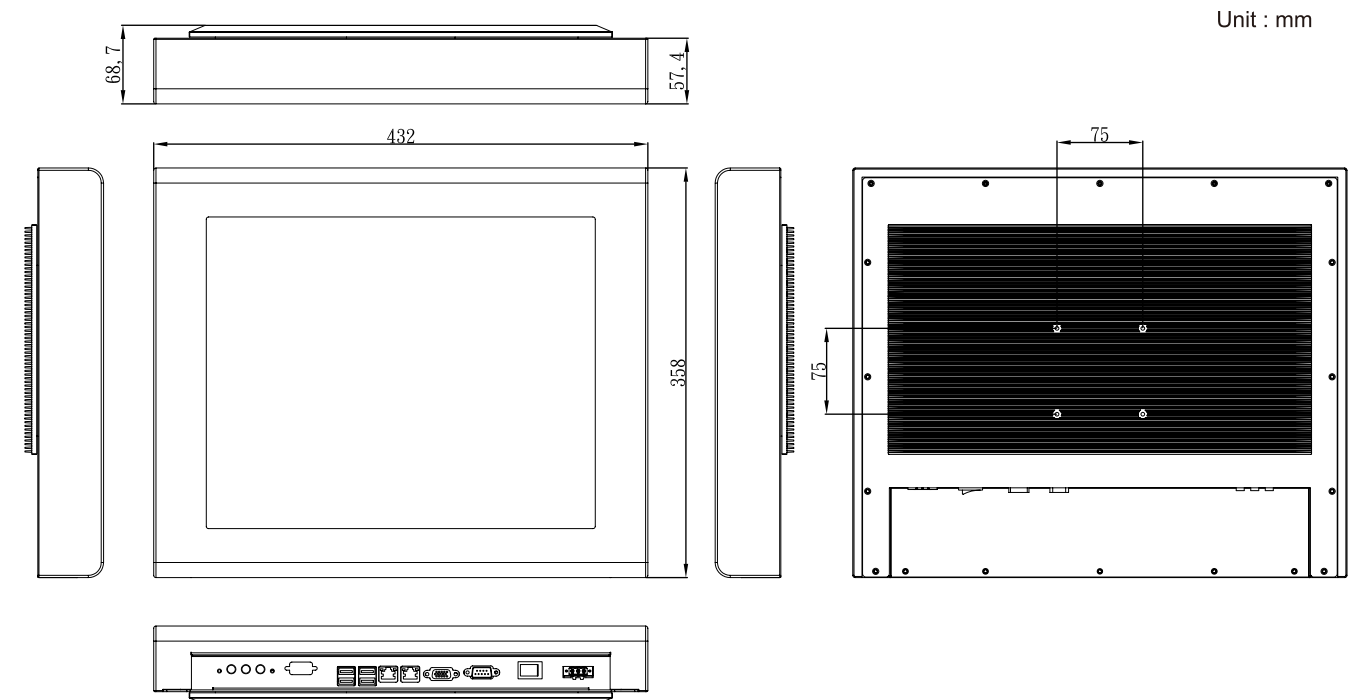

Mechanical	
Construction	Stainless steel front bezel and aluminum extrusion back cover
IP Rating	IP 65 except I/O side
Mounting	Panel / VESA 75x75 Mount
Dimension	432(W)x358(H)x68.7(D)mm
Net Weight	9 kgs
Environmental	
Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10~90% @40 °C, non-condensing
Certificate	Meet CE/FCC Class A
Ordering Information	
APC-3784	17" Intel® Atom™ N270 1.6GHz ultra slim IP 65 stainless steel fanless panel PC
APC-3784T	17" Intel® Atom™ N270 1.6GHz ultra slim IP 65 stainless steel fanless panel PC w/Touch screen